

Serial Number 09/785,996
Filing Date 20 February 2001
Inventor Stephen F. Oliver
 Stanley J. Olson

NOTICE

The above identified patent application is available for licensing. Requests for information should be addressed to:

OFFICE OF NAVAL RESEARCH
DEPARTMENT OF THE NAVY
CODE 00CC
ARLINGTON VA 22217-5660

DISTRIBUTION STATEMENT A
Approved for Public Release
Distribution Unlimited

20010628 058

1 Attorney Docket No. 79988

2
3 TORPEDO MOUNTED DISPENSER FOR A COIL
4 OF FLEX HOSE AND CONTROL WIRE

5
6 STATEMENT OF GOVERNMENT INTEREST

7 The invention described herein may be manufactured and used
8 by and for the Government of the United States of America for
9 Governmental purposes without the payment of any royalties
10 thereon or therefor.

11
12 BACKGROUND OF THE INVENTION

13 (1) Field of the Invention

14 The invention relates to guidance and control systems for
15 torpedoes, and is directed more particularly to a torpedo mounted
16 dispenser for paying out a flex hose and control wire from the
17 dispenser during travel of the torpedo from a launch tube toward
18 a target.

19 (2) Description of the Prior Art

20 Heavyweight torpedoes launched by submerged submarines
21 against other submarines or surface vessels are well known. Such
22 torpedoes are noted for their speed and accuracy. A guidance and
23 control wire is coiled in the torpedo fuel tank and extends

1 therefrom through a connector external to the torpedo. A
2 dispenser is mounted on the aft end of the torpedo and is adapted
3 to part from the torpedo upon launch of the torpedo. The
4 dispenser has mounted therein a further annularly coiled control
5 wire which, before launch of the torpedo, passes through the
6 aforesaid connector. As the torpedo travels from the submarine
7 launch tube toward a target, the wire in the torpedo fuel tank
8 pays out of the torpedo, and the flex hose and wire coiled in the
9 dispenser pays out. Both wires, connected together, hang
10 downwardly from the torpedo and the submarine, and maintain
11 communication between the submarine and the torpedo, permitting
12 course changes and other commands to be directed from the
13 submarine while the torpedo is in transit.

14 Referring to FIG. 1, it will be seen that the torpedo
15 mounted dispenser (TMD) 10 is mounted on the torpedo 12 when the
16 torpedo is loaded into a launch tube (not shown). The TMD 10 is
17 disconnectably attached to the torpedo 12, such that upon launch
18 of the torpedo, the TMD which is fastened in the launch tube,
19 parts from the torpedo and remains in the launch tube. A control
20 wire 14 is mounted in the torpedo 12 so as to pay out from a
21 passageway 16 in the torpedo. A fair-lead 18 is fixed to

1 passageway 16 in torpedo 12 allowing torpedo control wire 14 to
2 pay out therethrough.

3 Referring to FIG. 2, it will be seen in a illustrative prior
4 art TMD 10 having a flex hose 20 and a TMD control wire 22, the
5 flex hose 20 is coiled around a shock mount 24 and in a wire coil
6 chamber 38 inside circular shell 26. A wire inlet end of the
7 flex hose 20 is secured in wire coil chamber 38 inside TMD 10. A
8 flex hose connector 28 at the outlet end of the flex hose 20 is
9 adapted for connection to the fair lead 18 (FIG. 1). Thus, prior
10 to launch, control wire 22 is stored within wire coil chamber 38,
11 passes into flex hose 20 in the TMD 10 and passes out of flex
12 hose connector 28.

13 TMD control wire 22 is spliced to torpedo control wire 14,
14 using a splice sleeve 15 crimped onto both control wires 14, 22,
15 after TMD 10 is mounted on the torpedo 12. After mounting TMD,
16 flex hose connector 28 is assembled over fair lead 18 with shear
17 screws. The shear screws allow flex hose 20 separation from fair
18 lead 18 when the flex hose 20 is fully extended. After
19 separation, spliced torpedo control wire 14 and TMD control wire
20 22 pay out from their respective coils as the torpedo moves
21 through the water, the two control wires 14, 22 being connected
22 to form a single communication wire extending between the

1 submarine and the torpedo. Flex hose 20 remains attached to TMD
2 10 during torpedo transit and sinks below the submarine for
3 protecting the wire exiting from the TMD wire coil chamber 38
4 through hose 20.

5 Still referring to FIG. 2, it will be seen that the prior
6 art TMD is provided with elastomeric retainer rings 30, 32 which
7 serve to restrain the pay-out of flex hose 20, such that the flex
8 hose is dispensed in a controlled manner, without tangling of the
9 flex hose, or bunching up thereof, in unwinding from around the
10 shock mount 24. Flex hose connector 28 is positioned inside the
11 inner diameter of retainers 30 and 32 adjacent shock mount 24 to
12 allow flex hose 20 to properly pay out from TMD.

13 The retainer rings 30, 32 are mounted by passing through U-
14 shaped slots 34 in the shell 26 (FIGS. 1 and 2) and passing over
15 and into hooks 36. Each retainer ring 30, 32 is stretched to
16 engage with two opposite hooks 36.

17 In practice, it has been found that on occasion the retainer
18 rings 30, 32 fail to remain between the shock mount 24 and the
19 shell 26, and extend out over the shock mount 24, causing the
20 flex hose 20 to be directed inwardly toward the axis of the
21 shockmount 24, rather than paying out around the periphery of the
22 shock mount, increasing friction and noise of paying-out.

1 In addition, the TMD devices are customarily stored in
2 torpedo rooms in submarines for long periods of time, attached to
3 torpedoes. The elastomeric material of the retainer rings
4 deteriorates over time and snaps, making an audible noise and
5 debilitating the retainer pay-out control function. Continual
6 inspection is required. Accordingly, it is necessary under such
7 conditions to separate the TMD from the torpedo and effect
8 replacement of the failed retainer rings if spares are available
9 on board.

11 SUMMARY OF THE INVENTION

12 An object of the invention is, therefore, to provide an
13 improved torpedo mounted dispenser having a retainer means which
14 controls the pay-out of the flex hose and which resists
15 deterioration and resists displacement during operation.

16 With the above and other objects in view, as will
17 hereinafter appear, a feature of the present invention is the
18 provision of a torpedo mounted dispenser for a coil of flex hose
19 and control wire, and centrally contained wire coil inside a
20 cylindrical structure. The dispenser comprises a rigid shell
21 round in widthwise cross section, a circular shock mount fixed
22 within the shell and mounted centrally of the shell, the shell

1 and the shock mount defining an annular chamber therebetween.
2 The wire coil is contained in a central cylindrical structure of
3 the TMD. Hooks are mounted on an exterior wall of the shell and
4 slots are defined by the shell respectively proximate the hooks.
5 A retainer ring is disposed in the chamber, and retainer loops
6 each extend around at least a portion of the retainer ring,
7 through one of the slots, and is attached to one of the hooks.
8 The coil of flex hose and control wire is disposed in the annular
9 chamber and is movable lengthwise through the retainer ring while
10 uncoiling.

11 The above and other features of the invention, including
12 various novel details of construction and combinations of parts,
13 will now be more particularly described with reference to the
14 accompanying drawings and pointed out in the claims. It will be
15 understood that the particular device embodying the invention is
16 shown by way of illustration only and not as a limitation of the
17 invention. The principles and features of this invention may be
18 employed in various and numerous embodiments without departing
19 from the scope of the invention.

1 BRIEF DESCRIPTION OF THE DRAWINGS

2 Reference is made to the accompanying drawings in which is
3 shown an illustrative embodiment of the invention, from which its
4 novel features and advantages will be apparent, wherein
5 corresponding reference characters indicate corresponding parts
6 throughout the several views of the drawings and wherein:

7 FIG. 1 is a side elevational view, partly broken away, of an
8 aft portion of a torpedo and prior art torpedo mounted dispenser
9 connected together;

10 FIG. 2 is a rear elevational view of a prior art torpedo
11 mounted dispenser for a coil of flex hose and control wire;

12 FIG. 3 is a rear elevational view, in part broken away, of
13 one form of torpedo mounted dispenser illustrative of an
14 embodiment of the invention;

15 FIG. 4 is a perspective view of the dispenser of FIG. 3; and

16 FIGS. 5-7 are perspective views which illustrate alternative
17 means for fastening flex hose retaining loops on dispenser wall
18 mounted hooks.

19
20 DESCRIPTION OF THE PREFERRED EMBODIMENT

21 Referring to FIG. 3, it will be seen that the illustrative
22 dispenser 10 is similar to that shown in FIG. 2, and the flexhose

1 20 and control wire 22 are coiled in an annular chamber 38
2 defined by the shock mount 24 and the shell 26, as in the FIG. 2
3 dispenser.

4 However, a coil spring retainer ring 40 (FIGS. 3 and 4) is
5 disposed around the shock mount 24. The retainer ring 40
6 comprises a stainless steel coil spring 42 (FIG. 3) covered by a
7 protective jacket 44 of plastic material, or the like.

8 The retainer ring 40 is held in place by wire retainer loops
9 46a, 46b, 46c, and 46d. Each of the wire loops 46 extends around
10 the retainer ring 40 and through one of the slots 34, (FIG. 4)
11 and is mounted on one of the hooks 36 (FIGS. 5-7).

12 The two 180° spaces between the retainer ring 40 and shock
13 mount 24 provide space for the retaining ring to retract and
14 maintain contact with the remaining flex hose coiled surface.
15 The wire loops 46 may be covered by a coating or layer of plastic
16 material to reduce payout noise and friction. As is shown in
17 FIGS. 5 and 6, crimps 50 may be used to fix portions of the
18 retainer loops 46 to other portions thereof.

19 As shown in FIGS. 4 and 6, the wire retainer loops 46 may
20 loop around a portion of the coil spring 42, rather than around
21 the entire retainer ring 40. A clamp 52 (FIG. 6) may be disposed
22 around the hook 36 and wire loop retainer 46 to further fix the

1 loop to the hook 36. The clamp 52 can be a plastic or metal wire
2 tie or crimped device.

3 Referring to FIG. 7, there is shown a clip 54 slidably
4 mounted on a retainer loop 46 and having an orifice 56 therein to
5 serve to attach the clip 54 onto the hook 36. The clip 54 may be
6 placed on the hook 36 by moving the orifice 56 over the hook free
7 end 58.

8 While some examples of loop and hook attachments are shown
9 in FIGS. 5-7, it will be apparent that the retainer loops 46 may
10 be simply looped over the hooks 36, or may be connected to the
11 hooks in the alternative ways shown, or through any selected
12 means for securing a wire to a hook so that the wire will be
13 retained under tension or slack conditions.

14 In operation, launch of a torpedo causes the torpedo to part
15 from the TMD, the torpedo traveling through water toward a
16 target, and the TMD remaining in the torpedo tube. The control
17 wire pays out from the torpedo and from the TMD, the wire sinking
18 downwardly, out of the way of the torpedo level and direction of
19 travel and the submarine level and direction of travel. During
20 travel of the torpedo, course changes and other commands may be
21 communicated to the torpedo from the submarine. As the TMD flex
22 hose pays out, it is retained within the confines of the retainer

1 ring 40, which is sufficiently flexible to permit the flex hose
2 to move out with ease, but substantial enough to remain in place
3 and not be displaced by the outgoing flex hose. In due course,
4 the control wire snaps at some point due to stress or a coil
5 depletion, with a portion thereof possibly trailing behind the
6 torpedo and a portion possibly hanging from the flex hose and out
7 the torpedo tube. Both the flex hose and any control wire is
8 sheared off during closing of the torpedo tube outer door. When
9 the torpedo tube is pumped dry, the inner door is opened and the
10 TMD with residual flex hose and control wire is removed.

11 Inasmuch as the retainer ring 40 is of stainless steel,
12 there is virtually no deterioration. Similarly, inasmuch as the
13 retainer loops 46 are of stainless steel wire, there is little or
14 no deterioration over the normal periods of deployment and well
15 beyond.

16 There is thus provided an improved TMD featuring a retainer
17 ring which does not suddenly break and "ping" during a
18 deployment, and which, during operation, maintains its proper
19 position in the TMD.

20 It will be understood that many additional changes in the
21 details, materials, steps and arrangement of parts, which have
22 been herein described and illustrated in order to explain the

1 nature of the invention, may be made by those skilled in the art
2 within the principles and scope of the invention,
3

1 Attorney Docket No. 79988

2
3 TORPEDO MOUNTED DISPENSER FOR A COIL
4 OF FLEX HOSE AND CONTROL WIRE

5
6 ABSTRACT OF THE DISCLOSURE

7 A torpedo mounted dispenser for a coil of flex hose and
8 control wire includes a rigid shell round in widthwise cross
9 section, and a circular shock mount disposed centrally of the
10 shell, the shell and the shock mount defining an annular chamber
11 therebetween. Hooks are mounted on an exterior wall of the
12 shell. Slots are defined by the shell, each slot being proximate
13 one of the hooks. A retainer ring is disposed in the chamber.
14 Retainer loops each extend at least partly around the retainer
15 ring, through one of the slots, and is attached to one of the
16 hooks. The coil of flex hose and control wire is disposed in the
17 chamber and is movable lengthwise through the retainer ring while
18 uncoiling and paying out from the dispenser.

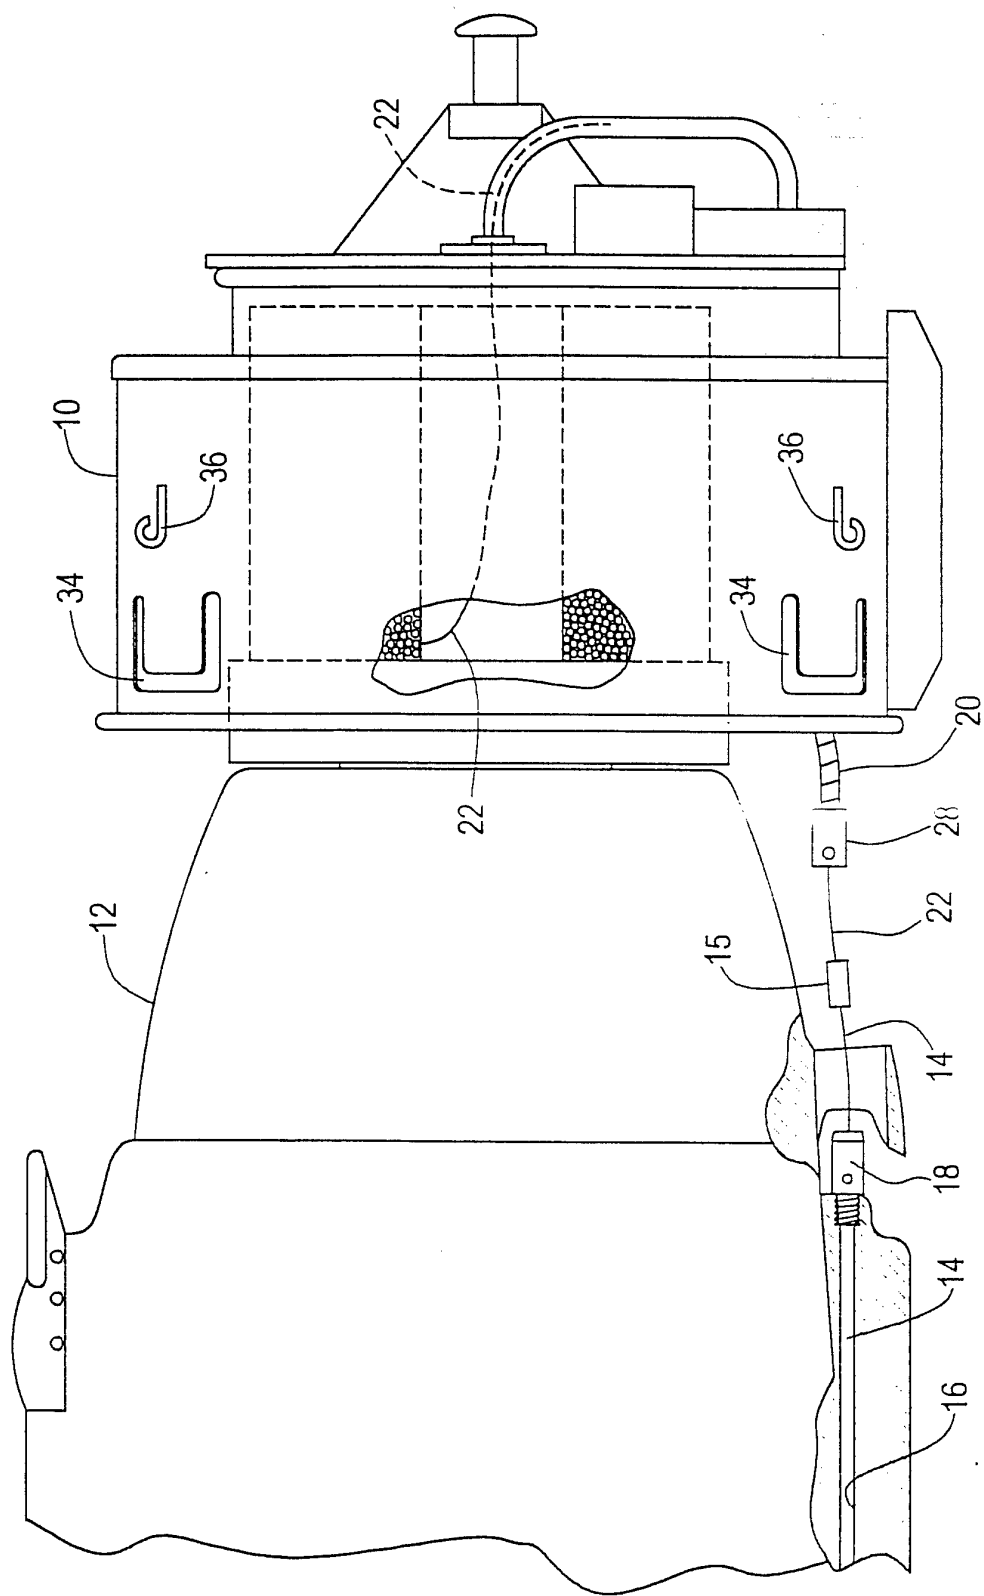


FIG. 1
PRIOR ART

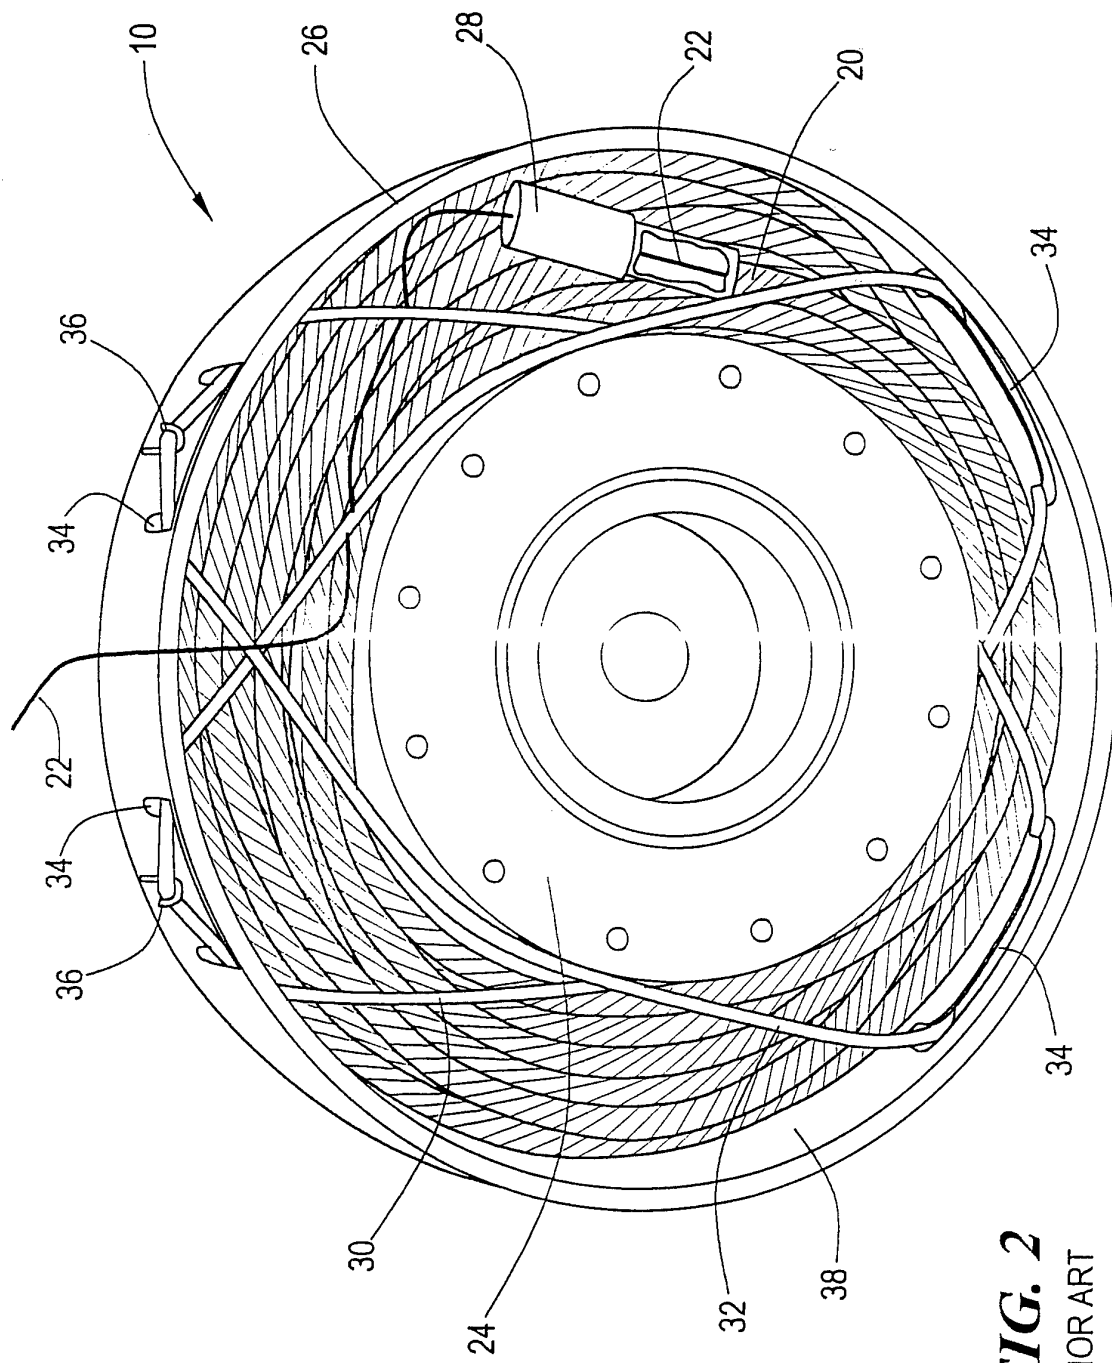


FIG. 2
PRIOR ART

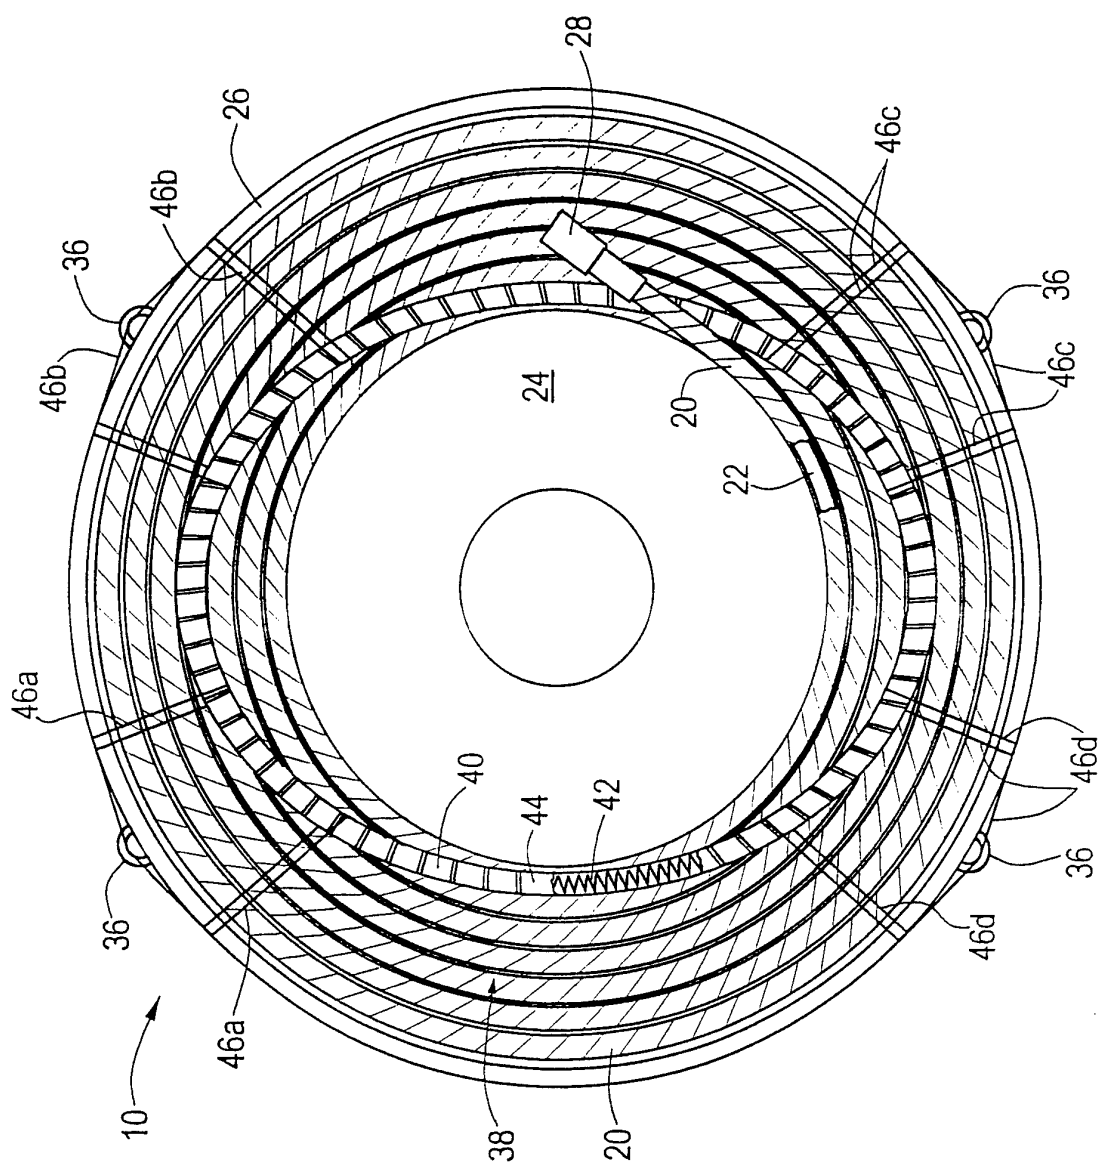


FIG. 3

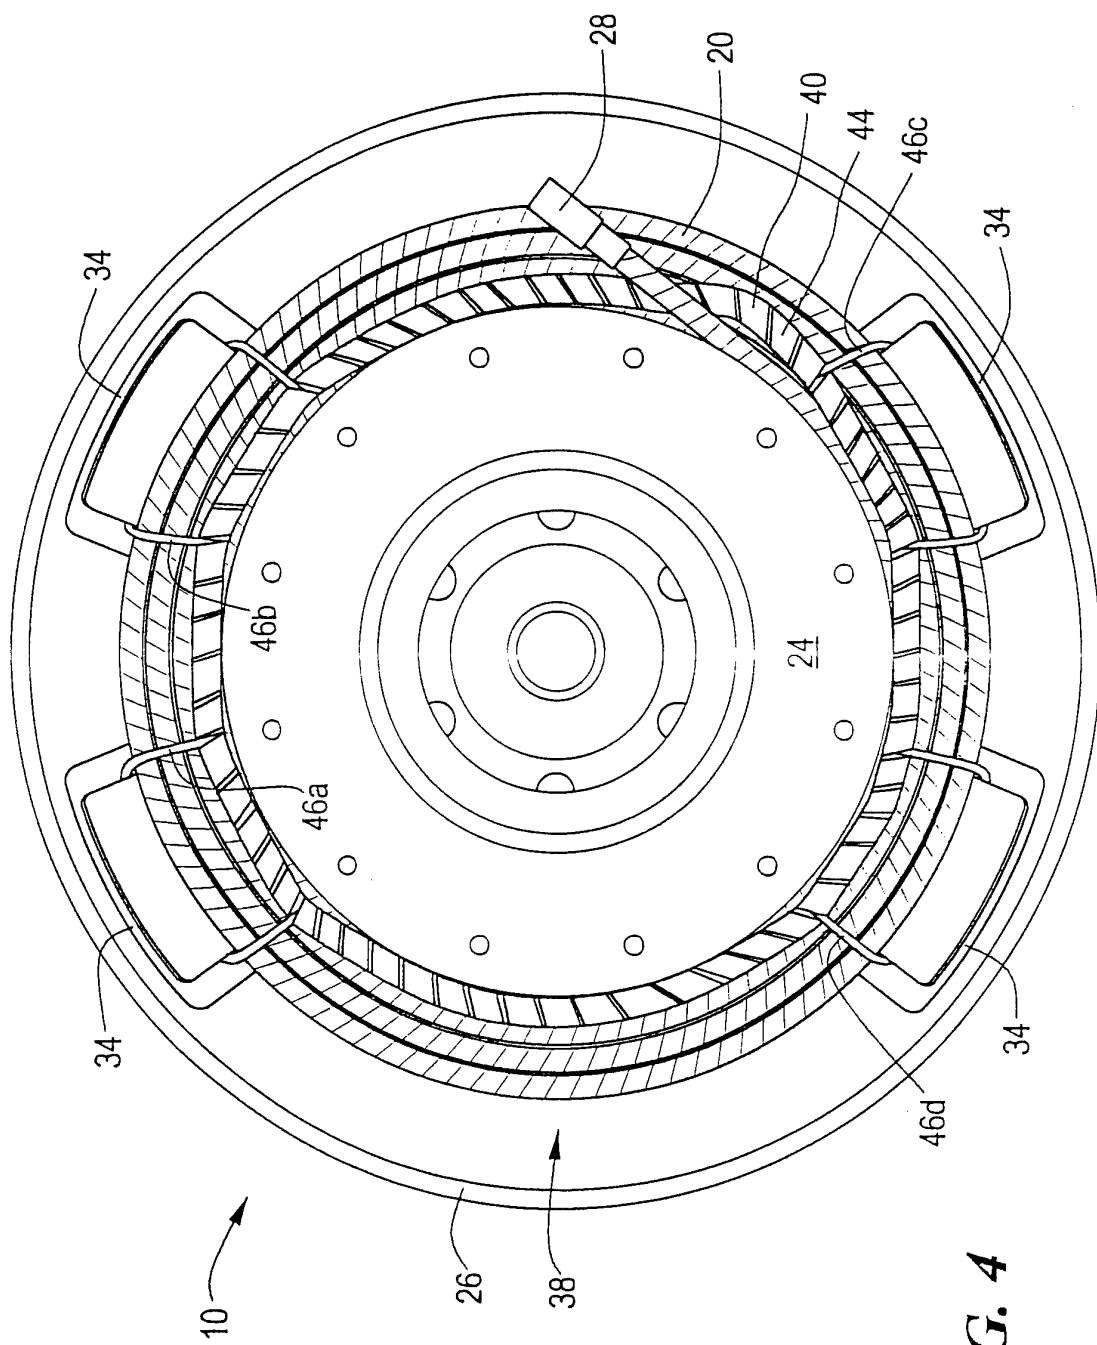


FIG. 4

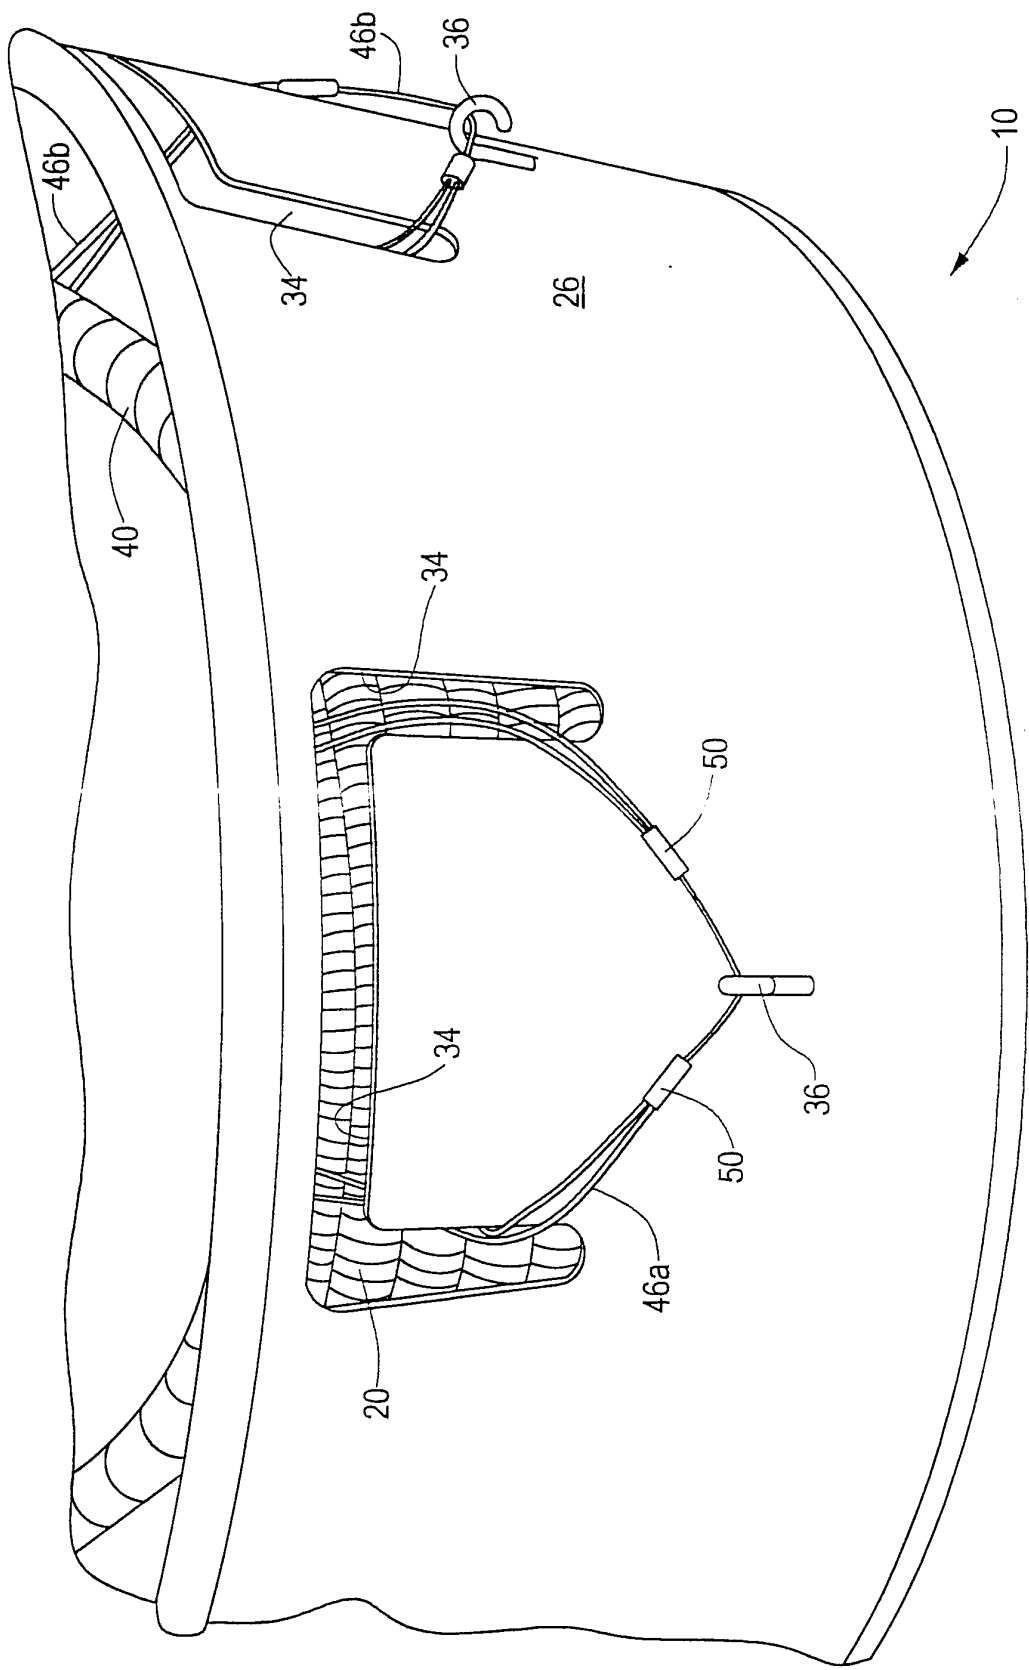


FIG. 5

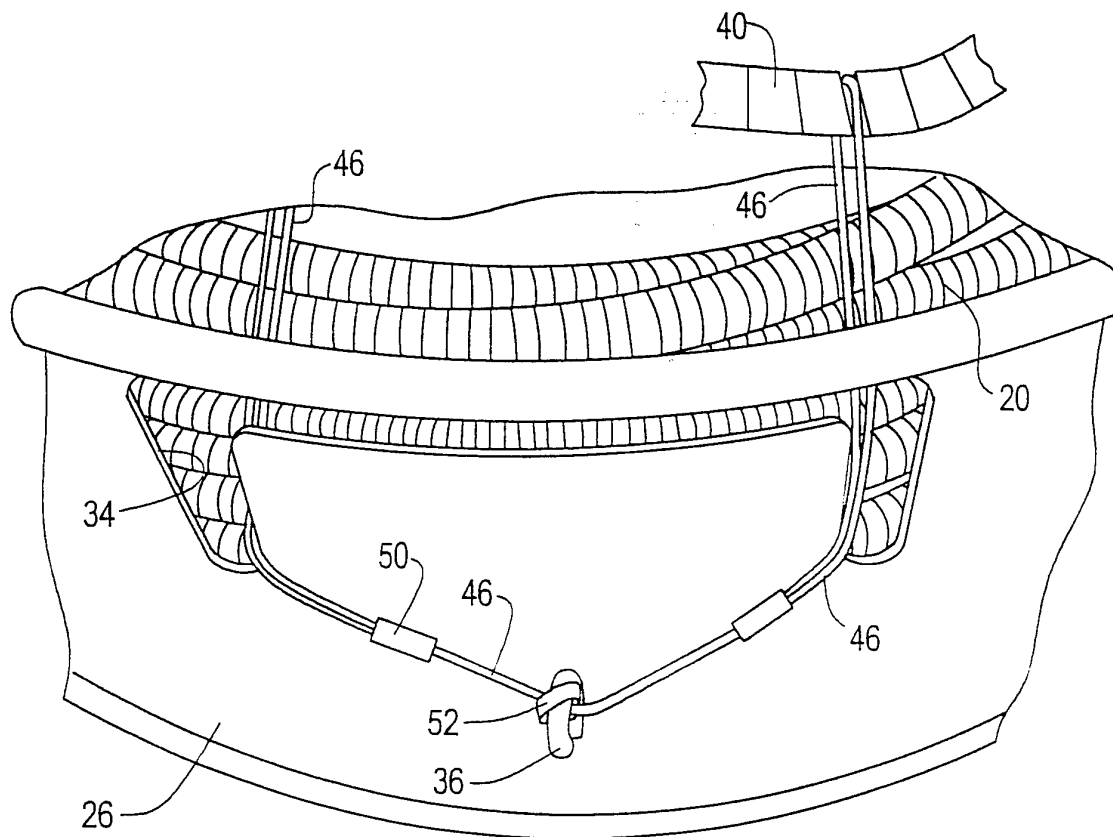


FIG. 6

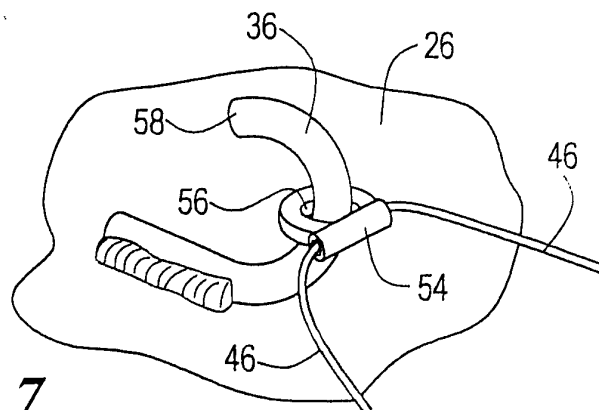


FIG. 7